

RETAIL PRODUCTS

# SM-300 Series Service Scale Printer


*DIGI SM-300 series promotes your business using a new concept for merchandising and networking*

- State of the art communications:
  - RS232
  - Ethernet built in!
  - Optional wireless!
- POP image printed on the label with BMP files
- Canadian nutritional facts, and ingredients

Valeur nutritive		Valeur nutritive	
Nutrition		Nutrition Facts	
Teneur Amount		Teneur Amount	% valeur quotidienne % Daily Value
Calories / Calo		Calories / Calories	
Lipides / Fat		Lipides / Fat	%
saturés / Satur		saturés / Saturated	%
+ trans / Trans		+ trans / Trans	%
Cholestérol / C		Cholestérol / Cholesterol	%
Sodium / Sodi		Sodium / Sodium	%
Glucides / Car		Glucides / Carbohydrate	%
Fibres / Fibre		Fibres / Fibre	%
Sucres / Suga		Sucres / Sugars	%
Protéines / Pro		Protéines / Protein	
Vitamine A / Vita		Vitamine A / Vitamin A	%
Vitamine C / Vita		Vitamine C / Vitamin C	%
Calcium / Calcu		Calcium / Calcium	%
Fer / Iron		Fer / Iron	%



- Full security features complete with tracking of all price and tare changes

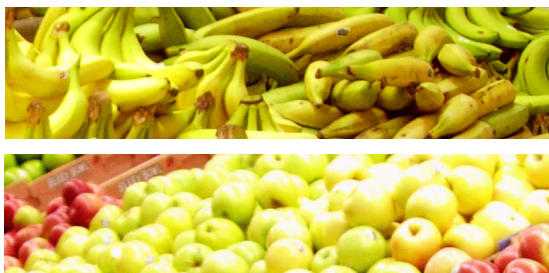

**GAMMA SCALE™**  
**Weighing Instruments**  
**Sales & Service**

Tel: (905)455-8333  
 Fax: (905)455-0658  
 E-mail: [info@gammascale.com](mailto:info@gammascale.com)  
 Website: [www.gammascale.com](http://www.gammascale.com)





# SM-300 Series Service Scale Printer

RETAIL PRODUCTS

## Main Features

<b>model</b>	<b>SM-300P</b> (Pole Type) <b>SM-300B</b> (Bench Type)
<b>Dimensions (in mm)</b>	477 (L) x 378 (W) x 548 (H) (Pole Type) 410 (L) x 378 (W) x 140 (H) (Bench Type)
<b>Capacity</b>	6 Kg (1 - 2 g increment) 15 Kg (2 - 5 g increment)
<b>Memory capacity</b>	1 MB (standard) 2 MB (maximum)
<b>Number of preset keys</b>	56 (pole type) / 32 (bench type)
<b>Display Resolution</b>	1 / 3,000 (dual range)
<b>Display</b>	LCD with backlight
	<b>Tare Weight:</b> 4 Digits <b>Weight:</b> 5 Digits <b>Unit Price:</b> 6 Digits <b>Total Price:</b> 7 Digits
<b>Printing</b>	<b>Thermal Printer</b> (Easy to change thermal head) <b>Paper Width:</b> Maximum 60 mm (label) 40 or 60 mm (receipt) <b>Speed:</b> 80 mm / second (label) 100 mm / second (receipt) <b>Label Size:</b> Maximum 60 (W) x 240 (L) mm
<b>Power Source</b>	<b>AC</b> 100 / 110 / 220 / 230 / 240 / Volts (50 / 60 Hz)
<b>Operating Temperature</b>	-10 C to +40 C
<b>Humidity</b>	15 % to 85 % RH
<b>Net Weight</b>	13 Kg (Pole Type) 11.3 Kg (Bench Type)
<b>Interface</b>	<b>Standard:</b> RS-232C for FL-1 or PC <b>Optional:</b> Wireless RF IEEE 802.11b/g, fish platter, Chinese character generator, RS485

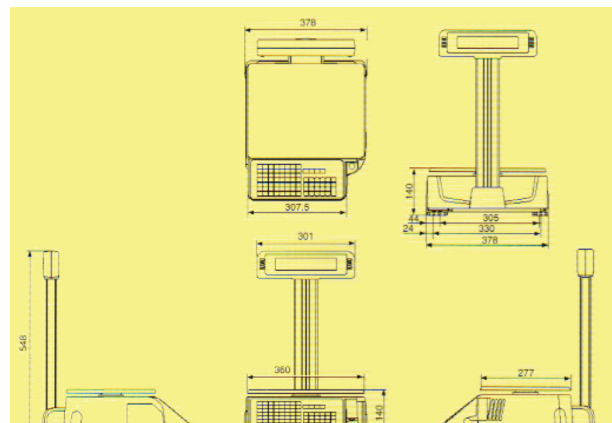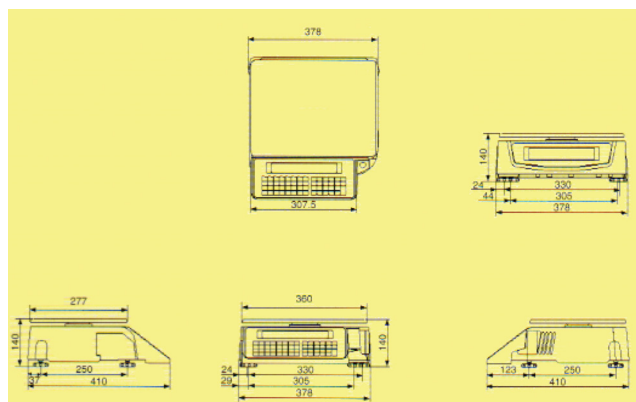

**GAMMA SCALE**™  
Weighing Instruments  
Sales & Service

Tel: (905)455-8333  
Fax: (905)455-0658  
E-mail: [info@gammascale.com](mailto:info@gammascale.com)  
Website: [www.gammascale.com](http://www.gammascale.com)